

Special Cases of Encodings by Generalized Adaptive Codes

Dragoş Trincă

Department of Computer Science & Engineering

University of Connecticut

371 Fairfield Road, Unit 2155, Storrs, CT 06269-2155, USA

dnt04001@engr.uconn.edu

Abstract. Adaptive (variable-length) codes associate variable-length codewords to symbols being encoded depending on the previous symbols in the input data string. This class of codes has been presented in [10, 11] as a new class of non-standard variable-length codes. Generalized adaptive codes (GA codes, for short) have been also presented in [10, 11] not only as a new class of non-standard variable-length codes, but also as a natural generalization of adaptive codes of any order. This paper is intended to continue developing the theory of variable-length codes by establishing several interesting connections between adaptive codes and other classes of codes. The connections are discussed not only from a theoretical point of view (by proving new results), but also from an applicative one (by proposing several applications). First, we prove that adaptive Huffman encodings and Lempel-Ziv encodings are particular cases of encodings by GA codes. Second, we show that any $(n, 1, m)$ convolutional code satisfying certain conditions can be modelled as an adaptive code of order m . Third, we describe a cryptographic scheme based on the connection between adaptive codes and convolutional codes, and present an insightful analysis of this scheme. Finally, we conclude by generalizing adaptive codes to (p, q) -adaptive codes, and discussing connections between adaptive codes and time-varying codes.

Keywords: adaptive codes, convolutional codes, error-correcting codes, generalized adaptive codes, prefix codes, time-varying codes, variable-length codes

1. Introduction

The theory of variable-length codes, one of the most studied areas of coding theory, continues to play an important role not only in the evolution of formal languages, but also in some applicative areas of computer science such as data compression. The aim of this paper is to continue developing and enriching this theory with new results, along with showing their effectiveness in concrete applications.

Specifically, we continue our study on *adaptive codes*, which have been recently presented in [10, 11] as a new class of non-standard variable-length codes. Intuitively, an adaptive code of order n associates a codeword to the symbol being encoded depending on the previous n symbols in the input data string. Generalized adaptive codes (GA codes, for short) have been also presented in [10, 11] not only as a new class of non-standard variable-length codes, but also as a natural generalization of adaptive codes of any order.

Both classes are described in detail in section 2. Then, we show that adaptive Huffman encodings and Lempel-Ziv encodings are particular cases of encodings by GA codes (sections 3 and 4). In section 5, we show that any $(n, 1, m)$ convolutional code satisfying a certain condition can be modelled as an adaptive code of order m . This result is exploited further in section 6, where an efficient cryptographic scheme based on convolutional codes is described. An insightful analysis of this cryptographic scheme is provided in the same section. In sections 7 and 8, we extend adaptive codes to (p, q) -adaptive codes, and present a new class of variable-length codes, called adaptive time-varying codes.

In the remainder of this introductory section, we recall some basic notions and notations used throughout the paper. We denote by $|S|$ the *cardinality* of the set S ; if x is a string of finite length, then $|x|$ denotes the length of x . The *empty string* is denoted by λ .

For an alphabet Σ , we denote by Σ^* the set $\bigcup_{n=0}^{\infty} \Sigma^n$ and by Σ^+ the set $\bigcup_{n=1}^{\infty} \Sigma^n$, where Σ^0 is the set $\{\lambda\}$. Also, we denote by $\Sigma^{\leq n}$ the set $\bigcup_{i=0}^n \Sigma^i$ and by $\Sigma^{\geq n}$ the set $\bigcup_{i=n}^{\infty} \Sigma^i$. Let us consider an alphabet Δ , X a finite and nonempty subset of Δ^+ , and $w \in \Delta^+$. A *decomposition of w over X* is any sequence of strings $u_1, u_2, \dots, u_h$ with $u_i \in X$ for all i , $1 \leq i \leq h$, such that $w = u_1 u_2 \dots u_h$. A *code over Δ* is any nonempty set $C \subseteq \Delta^+$ such that each string $w \in \Delta^+$ has at most one decomposition over C . A *prefix code over Δ* is any code C over Δ such that no string in C is proper prefix of another string in C .

If $\mathcal{A}$ is an algorithm and x its input, then we denote by $\mathcal{A}(x)$ its output. Also, we denote by $\mathbb{N}$ the set of natural numbers, and by $\mathbb{N}^*$ the set of nonzero natural numbers.

Finally, let us fix some useful notations which will be used in the description of the algorithms. Let $\mathcal{U} = (u_1, u_2, \dots, u_k)$ be a k -tuple. We denote by $\mathcal{U}.i$ the i -th component of $\mathcal{U}$, that is, $\mathcal{U}.i = u_i$ for all $i \in \{1, 2, \dots, k\}$. The 0-tuple is denoted by $()$. The length of a tuple $\mathcal{U}$ is denoted by $\text{Len}(\mathcal{U})$. If $\mathcal{V} = (v_1, v_2, \dots, v_b)$, $\mathcal{M} = (m_1, m_2, \dots, m_r, \mathcal{U})$, $\mathcal{N} = (n_1, n_2, \dots, n_s, \mathcal{V})$, and $\mathcal{P} = (p_1, \dots, p_{i-1}, p_i, p_{i+1}, \dots, p_t)$ are tuples, and q is an element or a tuple, then we define $\mathcal{P} \triangleleft q$, $\mathcal{P} \triangleright i$, $\mathcal{U} \triangle \mathcal{V}$, and $\mathcal{M} \diamond \mathcal{N}$ by:

- $\mathcal{P} \triangleleft q = (p_1, \dots, p_t, q)$,
- $\mathcal{P} \triangleright i = (p_1, \dots, p_{i-1}, p_{i+1}, \dots, p_t)$,
- $\mathcal{U} \triangle \mathcal{V} = (u_1, u_2, \dots, u_k, v_1, v_2, \dots, v_b)$,
- $\mathcal{M} \diamond \mathcal{N} = (m_1 + n_1, m_2 + 1, \dots, m_r + 1, n_2 + 1, \dots, n_s + 1, \mathcal{U} \triangle \mathcal{V})$,

where $m_1, m_2, \dots, m_r, n_1, n_2, \dots, n_s$ are integers.

2. Adaptive codes and GA codes

The aim of this section is to briefly review some basic definitions, results, and notations related to adaptive codes and generalized adaptive codes [10, 11].

Definition 2.1. Let Σ and Δ be two alphabets. A function $c : \Sigma \times \Sigma^{\leq n} \rightarrow \Delta^+$, $n \geq 1$, is called *adaptive code of order n* if its unique homomorphic extension $\bar{c} : \Sigma^* \rightarrow \Delta^*$, given by:

- $\bar{c}(\lambda) = \lambda$,
- $\bar{c}(\sigma_1 \sigma_2 \dots \sigma_m) = c(\sigma_1, \lambda) c(\sigma_2, \sigma_1) \dots c(\sigma_{n-1}, \sigma_1 \sigma_2 \dots \sigma_{n-2})$
 $c(\sigma_n, \sigma_1 \sigma_2 \dots \sigma_{n-1}) c(\sigma_{n+1}, \sigma_1 \sigma_2 \dots \sigma_n) c(\sigma_{n+2}, \sigma_2 \sigma_3 \dots \sigma_{n+1})$
 $c(\sigma_{n+3}, \sigma_3 \sigma_4 \dots \sigma_{n+2}) \dots c(\sigma_m, \sigma_{m-n} \sigma_{m-n+1} \dots \sigma_{m-1})$

for all strings $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$, is injective.

As it is clearly specified in the definition above, an adaptive code of order n associates a variable-length codeword to the symbol being encoded depending on the previous n symbols in the input data string. Let us take an example in order to better understand this mechanism.

Example 2.1. Let $\Sigma = \{a, b\}$ and $\Delta = \{0, 1\}$ be two alphabets, and $c : \Sigma \times \Sigma^{\leq 1} \rightarrow \Delta^+$ a function given as in the table below. One can verify that $\bar{c}$ is injective, and according to Definition 2.1, it follows that c is an adaptive code of order one.

Table 1. An adaptive code of order one.

$\Sigma \setminus \Sigma^{\leq 1}$	a	b	λ
a	0	1	00
b	10	00	11

Let $x = abaa \in \Sigma^+$ be an input data string. Using the definition above, we encode x by

$$\bar{c}(x) = c(a, \lambda) c(b, a) c(a, b) c(a, a) = 001010.$$

Example 2.2. Let us consider $\Sigma = \{a, b, c\}$ and $\Delta = \{0, 1\}$ two alphabets, and $c : \Sigma \times \Sigma^{\leq 2} \rightarrow \Delta^+$ a function given as in the following table. One can easily verify that $\bar{c}$ is injective, and according to Definition 2.1, c is an adaptive code of order two.

Table 2. An adaptive code of order two.

$\Sigma \setminus \Sigma^{\leq 2}$	a	b	c	aa	ab	ac	ba	bb	bc	ca	cb	cc	λ
a	0	11	10	00	1	10	01	10	11	11	11	0	00
b	10	000	11	11	01	00	00	11	01	101	00	10	11
c	111	01	00	10	00	11	11	00	00	0	10	11	10

Let $x = abacca \in \Sigma^+$ be an input data string. Using the definition above, we encode x by

$$\bar{c}(x) = c(a, \lambda) c(b, a) c(a, ab) c(c, ba) c(c, ac) c(a, cc) = 0010111110.$$

Let $c : \Sigma \times \Sigma^{\leq n} \rightarrow \Delta^+$ be an adaptive code of order n , $n \geq 1$. We denote by $C_{c, \sigma_1 \sigma_2 \dots \sigma_h}$ the set $\{c(\sigma, \sigma_1 \sigma_2 \dots \sigma_h) \mid \sigma \in \Sigma\}$, for all $\sigma_1 \sigma_2 \dots \sigma_h \in \Sigma^{\leq n} - \{\lambda\}$, and by $C_{c, \lambda}$ the set $\{c(\sigma, \lambda) \mid \sigma \in \Sigma\}$. We write $C_{\sigma_1 \sigma_2 \dots \sigma_h}$ instead of $C_{c, \sigma_1 \sigma_2 \dots \sigma_h}$, and C_λ instead of $C_{c, \lambda}$ whenever there is no confusion. Let us denote by $AC(\Sigma, \Delta, n)$ the set

$$\{c : \Sigma \times \Sigma^{\leq n} \rightarrow \Delta^+ \mid c \text{ is an adaptive code of order } n\}.$$

Theorem 2.1. Let Σ and Δ be two alphabets, and $c : \Sigma \times \Sigma^{\leq n} \rightarrow \Delta^+$ a function, $n \geq 1$. If C_u is prefix code, for all $u \in \Sigma^{\leq n}$, then $c \in AC(\Sigma, \Delta, n)$.

Proof:

Let us assume that $C_{\sigma_1 \sigma_2 \dots \sigma_h}$ is prefix code, for all $\sigma_1 \sigma_2 \dots \sigma_h \in \Sigma^{\leq n}$, but $c \notin AC(\Sigma, \Delta, n)$. By Definition 2.1, the unique homomorphic extension of c , denoted by $\bar{c}$, is not injective. This implies that $\exists u \sigma u', u \sigma' u'' \in \Sigma^+$, with $\sigma, \sigma' \in \Sigma$ and $u, u', u'' \in \Sigma^*$, such that $\sigma \neq \sigma'$ and

$$\bar{c}(u \sigma u') = \bar{c}(u \sigma' u''). \quad (1)$$

We can rewrite the equality (1) by

$$\bar{c}(u) c(\sigma, P_n(u)) \bar{c}(u') = \bar{c}(u) c(\sigma', P_n(u)) \bar{c}(u''), \quad (2)$$

where the function $P_n(\cdot)$ is given as below.

$$P_n(u) = \begin{cases} \lambda & \text{if } u = \lambda. \\ u_1 \dots u_q & \text{if } u = u_1 u_2 \dots u_q \text{ and } u_1, u_2, \dots, u_q \in \Sigma \text{ and } q \leq n. \\ u_{q-n+1} \dots u_q & \text{if } u = u_1 u_2 \dots u_q \text{ and } u_1, u_2, \dots, u_q \in \Sigma \text{ and } q > n. \end{cases}$$

By hypothesis, $C_{P_n(u)}$ is prefix code and $c(\sigma, P_n(u)), c(\sigma', P_n(u)) \in C_{P_n(u)}$.

Therefore, the set $\{c(\sigma, P_n(u)), c(\sigma', P_n(u))\}$ is a prefix code. But the equality (2) holds true if and only if $\{c(\sigma, P_n(u)), c(\sigma', P_n(u))\}$ is not a prefix set. Thus, our assumption leads to a contradiction. $\square$

Definition 2.2. Let $F : \mathbb{N}^* \times \Sigma^+ \rightarrow \Sigma^*$ be a function, where $\mathbb{N}^*$ denotes the set $\mathbb{N} - \{0\}$. A function $c_F : \Sigma \times \Sigma^* \rightarrow \Delta^+$ is called *generalized adaptive code* (GA code, for short) if its unique homomorphic extension $\bar{c}_F : \Sigma^* \rightarrow \Delta^*$, given by:

- $\bar{c}_F(\lambda) = \lambda$,
- $\bar{c}_F(\sigma_1 \sigma_2 \dots \sigma_m) = c_F(\sigma_1, F(1, \sigma_1 \sigma_2 \dots \sigma_m)) \dots c_F(\sigma_m, F(m, \sigma_1 \sigma_2 \dots \sigma_m))$

for all strings $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$, is injective.

Remark 2.1. The function F in Definition 2.2 is called the *adaptive function* corresponding to the GA code c_F . Clearly, a GA code c_F can be constructed if its adaptive function F is already constructed.

Remark 2.2. Let Σ and Δ be two alphabets. We denote by $GAC(\Sigma, \Delta)$ the set

$$\{c_F : \Sigma \times \Sigma^* \rightarrow \Delta^+ \mid c_F \text{ is a GA code}\}.$$

The following theorem proves that adaptive codes (of any order) are special cases of GA codes.

Theorem 2.2. Let Σ and Δ be alphabets. Then, $AC(\Sigma, \Delta, n) \subseteq GAC(\Sigma, \Delta)$ for all $n \geq 1$.

Proof:

Let $c_F \in AC(\Sigma, \Delta, n)$ be an adaptive code of order n , $n \geq 1$, and $F : \mathbb{N}^* \times \Sigma^+ \rightarrow \Sigma^*$ a function given by:

$$F(i, \sigma_1 \sigma_2 \dots \sigma_m) = \begin{cases} \lambda & \text{if } i = 1 \text{ or } i > m. \\ \sigma_1 \sigma_2 \dots \sigma_{i-1} & \text{if } 2 \leq i \leq m \text{ and } i \leq n+1. \\ \sigma_{i-n} \sigma_{i-n+1} \dots \sigma_{i-1} & \text{if } 2 \leq i \leq m \text{ and } i > n+1. \end{cases}$$

for all $i \geq 1$ and $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$. One can verify that $|F(i, \sigma_1 \sigma_2 \dots \sigma_m)| \leq n$, for all $i \geq 1$ and $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$. According to Definition 2.1, the function $\overline{c}_F$ is given by:

- $\overline{c}_F(\lambda) = \lambda$,
- $\overline{c}_F(\sigma_1 \sigma_2 \dots \sigma_m) = c_F(\sigma_1, \lambda) c_F(\sigma_2, \sigma_1) \dots c_F(\sigma_{n-1}, \sigma_1 \sigma_2 \dots \sigma_{n-2})$
 $c_F(\sigma_n, \sigma_1 \sigma_2 \dots \sigma_{n-1}) c_F(\sigma_{n+1}, \sigma_1 \sigma_2 \dots \sigma_n) c_F(\sigma_{n+2}, \sigma_2 \sigma_3 \dots \sigma_{n+1})$
 $c_F(\sigma_{n+3}, \sigma_3 \sigma_4 \dots \sigma_{n+2}) \dots c_F(\sigma_m, \sigma_{m-n} \sigma_{m-n+1} \dots \sigma_{m-1})$

for all strings $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$. It is easy to remark that

$$\overline{c}_F(\sigma_1 \sigma_2 \dots \sigma_m) = c_F(\sigma_1, F(1, \sigma_1 \sigma_2 \dots \sigma_m)) \dots c_F(\sigma_m, F(m, \sigma_1 \sigma_2 \dots \sigma_m))$$

for all $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$, which proves the theorem. $\square$

The adaptive mechanism in Definition 2.2 can be illustrated by the figure below. More precisely, the figure captures the idea behind this mechanism: the codeword associated to the current symbol depends on the symbol itself and a sequence of symbols chosen by the adaptive function.

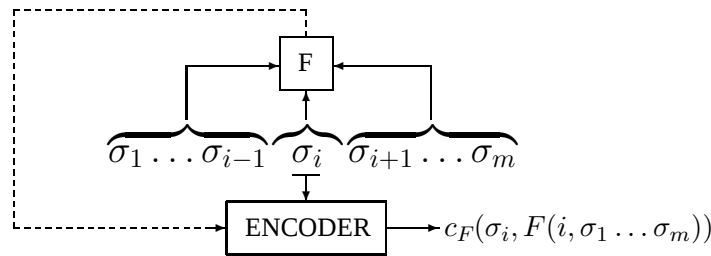


Figure 1. Encoding with a GA code.

Example 2.3. Let Σ and Δ be two alphabets, $c_F : \Sigma \times \Sigma^* \rightarrow \Delta^+$ a GA code, and $F : \mathbb{N}^* \times \Sigma^+ \rightarrow \Sigma^*$ its adaptive function. Let us consider F given as below.

$$F(i, \sigma_1 \sigma_2 \dots \sigma_m) = \begin{cases} \lambda & \text{if } i = 1 \text{ or } i > m. \\ \sigma_{i-1} & \text{if } 2 \leq i \leq m. \end{cases}$$

One can trivially verify that the function c_F is also an adaptive code of order one.

3. GA codes and adaptive Huffman codes

In this section, we prove that adaptive Huffman encodings are particular cases of encodings by GA codes. This result can be exploited further in data compression to develop efficient compression algorithms; for example, the algorithms presented in [11] combine adaptive codes with Huffman's classical algorithm.

The well-known Huffman algorithm is a two-pass encoding scheme, that is, the input must be read twice. The version used in practice is called the *adaptive Huffman algorithm*, which reads the input only once. Intuitively, the encoding of an input data string using the adaptive Huffman algorithm requires the construction of a sequence of *Huffman trees*.

Let Σ be an alphabet, and $w = w_1 w_2 \dots w_h$ a string over Σ . Denote by $\mathcal{T}_0(w), \mathcal{T}_1(w), \dots, \mathcal{T}_h(w)$ the sequence of Huffman trees constructed by the adaptive Huffman algorithm for the input string w . The Huffman tree $\mathcal{T}_0(w)$ is associated to the alphabet Σ (with the assumption that each symbol in Σ has frequency 1). For all $i \in \{1, 2, \dots, h\}$, the Huffman tree $\mathcal{T}_i(w)$ (associated to the string $w_1 w_2 \dots w_i$) is obtained by updating the tree $\mathcal{T}_{i-1}(w)$.

The procedure via this update takes place is called the *sibling transformation*, which can be described as follows. Let $\mathcal{T}_i(w)$ be the current tree and k the frequency of w_{i+1} ; the tree $\mathcal{T}_{i+1}(w)$ is obtained from $\mathcal{T}_i(w)$ by applying the following algorithm: compare w_{i+1} with its successors in the tree (from left to right and from bottom to top). If the immediate successor has frequency $k + 1$ or greater, then we do not have to change anything. Otherwise, w_{i+1} should be swapped with the last successor which has frequency k or smaller (only if this successor is not its parent). The frequency of w_{i+1} is incremented from k to $k + 1$. If w_{i+1} is the root of the tree, then the loop terminates. Otherwise, it continues with the parent of w_{i+1} (for further details on Huffman trees and the adaptive Huffman algorithm, the reader is referred to [8]).

The codeword associated to the symbol σ in the Huffman tree $\mathcal{T}_i(w)$ is denoted by $code(\sigma, \mathcal{T}_i(w))$, for all $i \in \{0, 1, \dots, h\}$.

Theorem 3.1. Adaptive Huffman encodings are particular cases of encodings by GA codes.

Proof:

Let Σ and Δ be two alphabets, w a string over Σ , and $F : \mathbb{N}^* \times \Sigma^+ \rightarrow \Sigma^*$, $c_F : \Sigma \times \Sigma^* \rightarrow \Delta^+$ two functions. Let us consider the function F given by:

$$F(i, \sigma_1 \sigma_2 \dots \sigma_m) = \begin{cases} \lambda & \text{if } i = 1 \text{ or } i > m. \\ \sigma_1 \sigma_2 \dots \sigma_{i-1} & \text{otherwise.} \end{cases}$$

and the function c_F by $c_F(\sigma, u) = code(\sigma, \mathcal{T}_{|u|}(u))$, for all $(\sigma, u) \in \Sigma \times \Sigma^*$. Let us assume that $\overline{c_F}$ is not injective, that is, $\exists u \sigma v, u \sigma' v' \in \Sigma^+$ such that $\sigma, \sigma' \in \Sigma$, $\sigma \neq \sigma'$ and $\overline{c_F}(u \sigma v) = \overline{c_F}(u \sigma' v')$. The previous equality can be rewritten by:

$$\overline{c_F}(u) code(\sigma, \mathcal{T}_{|u|}(u)) \overline{c_F}(v) = \overline{c_F}(u) code(\sigma', \mathcal{T}_{|u|}(u)) \overline{c_F}(v'). \quad (3)$$

Due to the prefix property of the set $\{code(\sigma, \mathcal{T}_{|u|}(u)), code(\sigma', \mathcal{T}_{|u|}(u))\}$, the equality (3) cannot hold true, which leads to the conclusion that our assumption is false. Thus, we conclude that c_F is a GA code, which proves the theorem. $\square$

Remark 3.1. If u is a prefix of w , then $\mathcal{T}_i(u) = \mathcal{T}_i(w)$, for all $i \leq |u|$.

Example 3.1. Let $\Sigma = \{a, b, c, d\}$ be an alphabet, and $w = bcabd \in \Sigma^+$. Applying the adaptive Huffman algorithm to the input string w , we get the following Huffman trees.

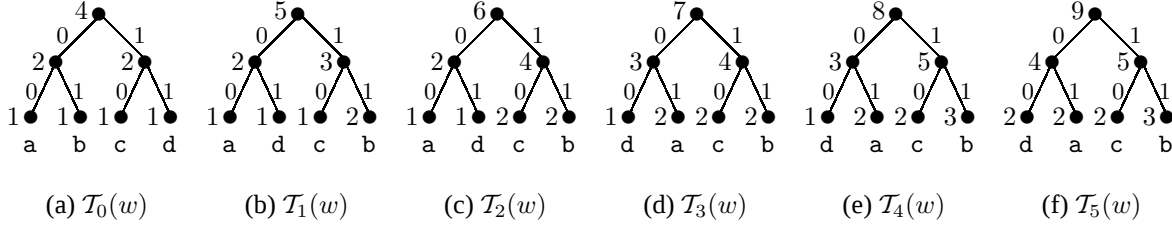


Figure 2. The Huffman trees associated to w : $T_0(w)$, $T_1(w)$, $T_2(w)$, $T_3(w)$, $T_4(w)$, and $T_5(w)$.

Let $F : \mathbb{N}^* \times \Sigma^+ \rightarrow \Sigma^*$, $c_F : \Sigma \times \Sigma^* \rightarrow \{0, 1\}^+$ be constructed as above. Then, we encode w by: $\overline{c_F}(bcabd) = c_F(b, \lambda)c_F(c, b)c_F(a, bc)c_F(b, bca)c_F(d, bcab) = code(b, T_0(\lambda))code(c, T_1(b))code(a, T_2(bc))code(b, T_3(bca))code(d, T_4(bcab)) = 0110001100$.

4. GA codes and Lempel-Ziv codes

The aim of this section is to prove that Lempel-Ziv encodings are particular cases of encodings by GA codes. Let Σ and Δ be two alphabets such that $\{0, 1, \dots, 9\} \cap \Sigma = \emptyset$. First, we recall the Lempel-Ziv parsing procedure of an input data string w , where $w = w_1w_2 \dots w_h$ is a string over Σ . For more details, the reader is referred to [16, 17].

The first variable-length block arising from the Lempel-Ziv parsing of the data string w is w_1 . The second block in the parsing is the shortest prefix of $w_2 \dots w_h$ which is not equal to w_1 . Consider that this second block is $w_2 \dots w_j$. Then, the third block will be the shortest prefix of $w_{j+1} \dots w_h$ which is not equal to either w_1 or $w_2 \dots w_j$. Suppose the Lempel-Ziv parsing has produced the first k variable-length blocks $B_1, B_2, \dots, B_k$ in the parsing, and $w^{(k)}$ is that part left of w after $B_1, B_2, \dots, B_k$ have been removed. Then, the next block B_{k+1} in the parsing is the shortest prefix of $w^{(k)}$ which is not equal to any of the preceding blocks $B_1, B_2, \dots, B_k$ (if there is no such block, then $B_{k+1} = w^{(k)}$ and the Lempel-Ziv parsing procedure terminates).

Theorem 4.1. Lempel-Ziv encodings are particular cases of encodings by GA codes.

Proof:

Let $\Sigma_1 = \Sigma \cup \{0, 1, \dots, 9\}$ be an alphabet, $\sigma_f \in \Sigma$ a fixed symbol, and let $F : \mathbb{N}^* \times \Sigma_1^+ \rightarrow \Sigma_1^*$, $c_F : \Sigma_1 \times \Sigma_1^* \rightarrow \{0, 1\}^*$ be two functions.

Let us consider F given by $F(i, \sigma_1\sigma_2 \dots \sigma_m) = i_1i_2 \dots i_q\sigma_f\sigma_1\sigma_2 \dots \sigma_m$, for all $i \in \mathbb{N}^*$ and $\sigma_1\sigma_2 \dots \sigma_m \in \Sigma_1^+$, where $i_1, i_2, \dots, i_q \in \{0, 1, \dots, 9\}$ are the digits corresponding to i (from left to right).

Let $u = u_1u_2 \dots u_p$ be a string over Σ_1 , that is, $u_i \in \Sigma_1$ for all $i \in \{1, 2, \dots, p\}$. Consider the following notations.

$$\bullet \text{ fixed}(u) = \begin{cases} 1 & \text{if } p \geq 3 \text{ and } \exists i \in \{2, 3, \dots, p-1\}, \text{ such that } u_i = \sigma_f \\ & \text{and } u_j \in \{0, 1, \dots, 9\} \text{ for all } j \in \{1, 2, \dots, i-1\}. \\ 0 & \text{otherwise.} \end{cases}$$

- $left(u) = \begin{cases} u_1 u_2 \dots u_r & \text{if } fixed(u) = 1, u_i \in \{0, 1, \dots, 9\} \text{ for all} \\ & i \in \{1, 2, \dots, r\}, \text{ and } u_{r+1} = \sigma_f. \\ \lambda & \text{otherwise.} \end{cases}$
- $right(u) = \begin{cases} v & \text{if } fixed(u) = 1 \text{ and } u = left(u)\sigma_f v. \\ \lambda & \text{otherwise.} \end{cases}$
- $goodpos(u) = \begin{cases} 1 & \text{if } fixed(u) = 1 \text{ and } |left(u)| + 2 \leq left(u) \leq |u|. \\ 0 & \text{otherwise.} \end{cases}$

Let us consider c_F given by

$$c_F(\sigma, \sigma_1 \sigma_2 \dots \sigma_m) = \begin{cases} LZ(\sigma, \sigma_1 \sigma_2 \dots \sigma_m) & \text{if } fixed(\sigma_1 \sigma_2 \dots \sigma_m) = 1, goodpos(\sigma_1 \sigma_2 \dots \sigma_m) = 1 \\ & \text{and } \sigma = \sigma_{left(\sigma_1 \sigma_2 \dots \sigma_m)}. \\ \lambda & \text{otherwise.} \end{cases}$$

where $LZ(\sigma, \sigma_1 \sigma_2 \dots \sigma_m)$ is defined as follows: let $B_1, B_2, \dots, B_t$ be the blocks arising from the Lempel-Ziv parsing of the string $right(\sigma_1 \sigma_2 \dots \sigma_m)$, and

$$B_z = \sigma_{|left(\sigma_1 \sigma_2 \dots \sigma_m)|+2+j_1} \dots \sigma_{|left(\sigma_1 \sigma_2 \dots \sigma_m)|+2+j_2}, \quad (4)$$

where $z \in \{1, \dots, t\}$, $0 \leq j_1 \leq j_2 \leq |right(\sigma_1 \sigma_2 \dots \sigma_m)| - 1$, and

$$|left(\sigma_1 \sigma_2 \dots \sigma_m)| + 2 + j_1 \leq left(\sigma_1 \sigma_2 \dots \sigma_m) \leq |left(\sigma_1 \sigma_2 \dots \sigma_m)| + 2 + j_2. \quad (5)$$

If $left(\sigma_1 \sigma_2 \dots \sigma_m) = |left(\sigma_1 \sigma_2 \dots \sigma_m)| + 2 + j_2$, then let $LZ(\sigma, \sigma_1 \sigma_2 \dots \sigma_m)$ be the codeword associated by the Lempel-Ziv data compression algorithm to the block B_z . Otherwise, we consider that $LZ(\sigma, \sigma_1 \sigma_2 \dots \sigma_m) = \lambda$. One can easily verify that $\overline{c_F}(\sigma_1 \sigma_2 \dots \sigma_m)$ is the encoding of $\sigma_1 \sigma_2 \dots \sigma_m$ by the Lempel-Ziv data compression algorithm, for all $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma_1^+$. Thus, we have obtained that $\overline{c_F}$ is injective, which proves the theorem. $\square$

Example 4.1. Let $\Sigma = \{a, b, c\}$, $\Sigma_1 = \Sigma \cup \{0, 1, \dots, 9\}$ be two alphabets, and let $F : \mathbb{N}^* \times \Sigma_1^+ \rightarrow \Sigma_1^*$, $c_F : \Sigma_1 \times \Sigma_1^* \rightarrow \{0, 1\}^*$ be two functions given as in Theorem 4.1 (considering $\sigma_f = a$). Also, let $w = bcc7ba \in \Sigma_1^+$ be an input string.

Applying the Lempel-Ziv parsing procedure to the input string w , we get the following blocks: $B_1 = b$, $B_2 = c$, $B_3 = c7$, and $B_4 = ba$. Let us denote by $codeLZ(B_i)$ the codeword associated by the Lempel-Ziv encoder to the block B_i , for all $i \in \{1, 2, 3, 4\}$. One can verify that we get the following results:

- $codeLZ(B_1) = 1011$,
- $codeLZ(B_2) = 01100$,
- $codeLZ(B_3) = 100001$,
- $codeLZ(B_4) = 010111$.

Finally, we encode $w = \text{bcc7ba}$ by the GA code c_F as shown below.

$$\begin{aligned}
\overline{c_F}(w) &= c_F(\mathbf{b}, F(1, \text{bcc7ba}))c_F(\mathbf{c}, F(2, \text{bcc7ba}))c_F(\mathbf{c}, F(3, \text{bcc7ba})) \\
&\quad c_F(\mathbf{7}, F(4, \text{bcc7ba}))c_F(\mathbf{b}, F(5, \text{bcc7ba}))c_F(\mathbf{a}, F(6, \text{bcc7ba})) \\
&= c_F(\mathbf{b}, 1\text{abcc7ba})c_F(\mathbf{c}, 2\text{abcc7ba})c_F(\mathbf{c}, 3\text{abcc7ba}) \\
&\quad c_F(\mathbf{7}, 4\text{abcc7ba})c_F(\mathbf{b}, 5\text{abcc7ba})c_F(\mathbf{a}, 6\text{abcc7ba}) \\
&= LZ(\mathbf{b}, 1\text{abcc7ba}) \cdot LZ(\mathbf{c}, 2\text{abcc7ba}) \cdot \lambda \cdot LZ(\mathbf{7}, 4\text{abcc7ba}) \cdot \lambda \cdot LZ(\mathbf{a}, 6\text{abcc7ba}) \\
&= \text{code}LZ(B_1)\text{code}LZ(B_2)\text{code}LZ(B_3)\text{code}LZ(B_4) \\
&= 101101100100001010111.
\end{aligned}$$

5. Adaptive codes and convolutional codes

Convolutional codes [5] are one of the most widely used channel codes in practical communication systems. These codes are developed with a separate strong mathematical structure and are primarily used for real time error correction. Convolutional codes convert the entire data stream into one single codeword: the encoded bits depend not only on the current k input bits, but also on past input bits. The same strategy is used by adaptive variable-length codes. The aim of this section is to discuss the connection between adaptive codes and convolutional codes. Specifically, we show how a convolutional code can be modelled as an adaptive code. Before stating the results, let us first present a brief description of convolutional codes.

Convolutional codes are commonly specified by three parameters: n , k , and m , where

- n is the number of output bits,
- k is the number of input bits,
- and m is the number of memory registers.

The quantity km is called the *constraint length*, and represents the number of bits in the encoder memory that affect the generation of the n output bits. Also, the quantity k/n is called the *code rate*, and is a measure of the efficiency of the code. A convolutional code with parameters n, k, m is usually referred to as an (n, k, m) convolutional code. For an (n, k, m) convolutional code, the encoding procedure is entirely defined by n *generator polynomials*. Usually, these generator polynomials are represented as binary $(m+1)$ -tuples. Also, throughout this section, we consider only $(n, 1, m)$ convolutional codes.

Let us consider an $(n, 1, m)$ convolutional code with $P_1, P_2, \dots, P_n$ being its generator polynomials, and let $x = x_1x_2 \dots x_t \in \{0, 1\}^+$ be an input data string. The string x is encoded by $y = y_1y_2 \dots y_{nt}$, where the substring $y_{in+1} \dots y_{in+n}$ encodes the input bit x_{i+1} , for all $i \in \{0, 1, \dots, t-1\}$. Precisely, if $i \in \{0, 1, \dots, t-1\}$ and $j \in \{1, 2, \dots, n\}$, then

$$y_{in+j} = w_{i-i_1^j+1} \oplus w_{i-i_2^j+1} \oplus \dots \oplus w_{i-i_{q(j)}^j+1},$$

where $\{i_1^j, i_2^j, \dots, i_{q(j)}^j\} = \{z \in \{1, 2, \dots, m+1\} \mid P_j.z = 1\}$, $i_1^j \leq i_2^j \leq \dots \leq i_{q(j)}^j$, $\oplus$ denotes the modulo-2 addition, and

$$w_{i-l} = \begin{cases} x_{i-l+1} & \text{if } i-l+1 \geq 1. \\ 0 & \text{otherwise.} \end{cases}$$

for all $l \in \{0, 1, \dots, m\}$.

Example 5.1. Let us consider a $(2, 1, 2)$ convolutional code with $P_1 = (0, 1, 1)$, $P_2 = (1, 0, 1)$ being its generator polynomials. This convolutional code can be represented graphically as in the figure below.

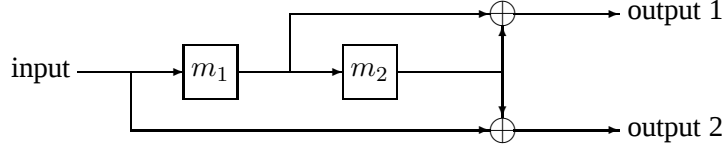


Figure 3. A $(2, 1, 2)$ convolutional code.

Let us now describe the encoding mechanism. Let b be the current input bit being encoded, and let b_1 and b_2 be the current bits stored in the memory registers m_1 and m_2 , respectively. Given that $P_1 = (0, 1, 1)$, the first output bit is obtained by adding (modulo-2) b_1 and b_2 . The second bit is obtained by adding (modulo-2) b and b_2 . After both output bits have been obtained, b and b_1 become the new values stored in the memory registers m_1 and m_2 , respectively. For example, if $x = 0101$ is an input bitstring, one can verify that the output is 00011010 (for each input bit, the output is obtained by concatenating the two output bits).

Theorem 5.1. Any $(n, 1, m)$ convolutional code with $P_1, P_2, \dots, P_n$ being its generator polynomials, and satisfying the condition

$$\{z \in \{1, 2, \dots, n\} \mid P_z \cdot 1 = 1\} \neq \emptyset,$$

is an adaptive code of order m .

Proof:

Let $c : \{0, 1\} \times \{0, 1\}^{\leq m} \rightarrow \{0, 1\}^n$ be a function. Consider an $(n, 1, m)$ convolutional code with $P_1, P_2, \dots, P_n$ being its generator polynomials. Also, let us consider that c is given by:

$$c(x, x_1 x_2 \dots x_p) = P_1[x x_p x_{p-1} \dots x_1 z_p^m] P_2[x x_p x_{p-1} \dots x_1 z_p^m] \dots P_n[x x_p x_{p-1} \dots x_1 z_p^m],$$

for all $x \in \{0, 1\}$ and $x_1 x_2 \dots x_p \in \{0, 1\}^{\leq m}$, where

- $z_p^m = \underbrace{00 \dots 0}_{m-p}$,
- and $P_j[b_1 b_2 \dots b_{m+1}] = b_{i_1^j} \oplus b_{i_2^j} \oplus \dots \oplus b_{i_{q(j)}^j}$, with $\{i_1^j, i_2^j, \dots, i_{q(j)}^j\} = \{z \mid P_j \cdot z = 1\}$ and $i_1^j \leq i_2^j \leq \dots \leq i_{q(j)}^j$.

Let $b_1 b_2 \dots b_q \in \{0, 1\}^{\leq m}$. By hypothesis, there exists $j \in \{1, 2, \dots, n\}$ such that $P_j \cdot 1 = 1$. This leads to the conclusion that

$$\{c(0, b_1 b_2 \dots b_q), c(1, b_1 b_2 \dots b_q)\}$$

is a prefix code. Thus, we have obtained that C_u (as defined in section 2) is a prefix code, for all $u \in \{0, 1\}^{\leq m}$. According to Theorem 2.1, c is an adaptive code of order m . $\square$

6. A cryptographic scheme based on convolutional codes

The results presented in the previous section lead to an efficient data encryption scheme. Specifically, every $(1, 1, m)$ convolutional code satisfying the condition in Theorem 5.1 can be used for data encryption (and decryption), without any additional information. Let us consider an $(1, 1, m)$ convolutional code with P being its generator polynomial. If $P.1 = 0$ (that is, the condition in Theorem 5.1 is not satisfied), then the output bits depend *only* on the bits stored in the memory registers. For example, let b be the current input bit, and $b_1, b_2, \dots, b_m$ the bits stored in the memory registers before encoding the bit b . The output bit b_{out} depends, in this case, only on the bits $b_1, b_2, \dots, b_m$. This makes the decryption procedure impossible (without any additional information), since the output cannot be uniquely decoded. Thus, we consider only $(1, 1, m)$ convolutional codes that satisfy the condition given in Theorem 5.1. Also, we consider that any $(1, 1, m)$ convolutional code is completely specified by

- P , its generator polynomial,
- and a binary m -uple Q , where $Q.i$ denotes the bit stored initially in the memory register m_i , for all $i \in \{1, 2, \dots, m\}$.

Public and Private Keys. Let us denote by *Public* the set of public keys, and by *Private* the set of private keys. There are three parameters in our cryptographic scheme: m , P , and Q . Note that by making P and/or Q available to any user, the parameter m is implicitly made available as well (since P consists of $m + 1$ elements, and Q has m elements). Thus, if P and Q are both public keys, then the information can be correctly decoded. Except for the case when both P and Q are public keys, all other cases lead to a powerful cryptographic scheme. The parameters P and Q shouldn't normally be among the public keys, since both P and Q give partial information about the encryption/decryption procedures. Thus, we consider that in practice only the parameter m should be included among the public keys. Keeping all three parameters as private keys increases the security level as well (by a constant factor).

Table 3. Possible ways of partitioning the keys.

<i>Public</i>	<i>Private</i>	Security level	Complexity
$\emptyset$	$\{P, Q, m\}$	High	$\mathcal{O}(4^m)$
$\{m\}$	$\{P, Q\}$	High	$\mathcal{O}(4^m)$
$\{P\}$	$\{Q\}$	High	$\mathcal{O}(2^m)$
$\{Q\}$	$\{P\}$	High	$\mathcal{O}(2^m)$

Security and Complexity. There are four ways of partitioning the keys, as shown in the table above. Note that if P or Q is a public key, then it doesn't make sense to include m as a public or private key, since if P or Q is made available then m is implicitly a public key. Let us discuss each case separately.

Public = $\emptyset$ **and** *Private* = $\{P, Q, m\}$. In this case, an unauthorized user has no information about the encryption/decryption procedure. A possible attack cannot be more efficient than a naive search, starting with $m = 1$ and trying all possible cases for P and Q . Since there are 2^m possible binary

m -tuples, we can conclude that the total number of decoding attempts is at most

$$2^1 \cdot 2^1 + 2^2 \cdot 2^2 + \dots + 2^m \cdot 2^m = \frac{4^{m+1} - 4}{3} = \frac{2^{2m+2} - 4}{3}.$$

For example, if $m = 100$, then the total number of decoding attempts is at most

$$\frac{2^{202} - 4}{3} \approx 2.1 \cdot 10^{60}.$$

Definitely, the scheme is highly efficient in this case.

Public = $\{m\}$ **and** *Private* = $\{P, Q\}$. Even if m is a public key, the efficiency of our scheme is not affected at all. A possible attack must try all possible cases for P and Q (in the worst case). Thus, the total number of decoding attempts is at most $2^m \cdot 2^m = 2^{2m}$. For $m = 100$, the total number of decoding attempts is at most $2^{200} \approx 1.6 \cdot 10^{60}$.

Public = $\{P\}$ **and** *Private* = $\{Q\}$. Since only Q is a private key in this case, we can conclude that the total number of decoding attempts is at most 2^m . For $m = 100$, $2^{100} \approx 1.2 \cdot 10^{30}$.

Public = $\{Q\}$ **and** *Private* = $\{P\}$. The total number of decoding attempts is at most 2^m , since only P is a private key in this case.

Encryption and Decryption. A detailed description of the encryption algorithm is provided below. Note that m is a positive integer, P is a binary $(m + 1)$ -tuple that satisfies the condition in Theorem 5.1, and Q is a binary m -tuple.

<pre> Input: m, P, Q, and $x = x_1x_2 \dots x_t \in \{0, 1\}^+$ Output: $y \in \{0, 1\}^+$ $S \leftarrow \emptyset; y \leftarrow \lambda$ For $i \leftarrow 2$ to $m + 1$ do If $P.i = 1$ then $S \leftarrow S \cup \{i - 1\}$ Endif Endfor For $i \leftarrow 1$ to t do $z \leftarrow x_i$ For each $j \in S$ do $z \leftarrow z \oplus Q.j$ Endfor $y \leftarrow y \cdot z; Q \leftarrow Q \triangleright m; Q \leftarrow (x_i) \triangle Q$ Endfor </pre>
--

Figure 4. Convolutional encryption.

As mentioned in the beginning of this section, the decryption algorithm is based on the equality $P.1 = 1$. Let y_i be the current bit being decoded, Q the content of the memory registers before decoding y_i , $S = \{i_1, i_2, \dots, i_j\}$ the set of indexes of those memory registers that contribute to the output bit, and

$z = Q.i_1 \oplus Q.i_2 \oplus \dots \oplus Q.i_j$. If $y_i = 0$, we can conclude that $x_i = z$ (since $x_i \oplus z = 0$). Otherwise, if $y_i = 1$, it follows that $x_i = \bar{z}$, where $\bar{z}$ denotes the complement of z . A complete description of the algorithm is given below.

```

Input:  $y = y_1 y_2 \dots y_t \in \{0, 1\}^+$ ,  $m$ ,  $P$ , and  $Q$ 
Output:  $x \in \{0, 1\}^+$ 



---


 $S \leftarrow \emptyset$ ;  $x \leftarrow \lambda$ 
For  $i \leftarrow 2$  to  $m + 1$  do
    If  $P.i = 1$  then
         $S \leftarrow S \cup \{i - 1\}$ 
    Endif
Endfor
For  $i \leftarrow 1$  to  $t$  do
     $z \leftarrow 0$ 
    For each  $j \in S$  do
         $z \leftarrow z \oplus Q.j$ 
    Endfor
    If  $z \neq y_i$  then
         $z \leftarrow 1$ 
    Endif
     $x \leftarrow x \cdot z$ ;  $Q \leftarrow Q \triangleright m$ ;  $Q \leftarrow (z) \triangle Q$ 
Endfor
    
```

Figure 5. Convolutional decryption.

Example 6.1. Consider an $(1, 1, 2)$ convolutional code with $P = (1, 0, 1)$ and $Q = (0, 1)$. Graphically, this code is represented as in the figure below. Initially, the memory register m_1 stores the bit 0 ($= Q.1$),




Figure 6. An $(1, 1, 2)$ convolutional code.

and the memory register m_2 stores the bit 1 ($= Q.2$). Let $x = 001 \in \{0, 1\}^+$ be an input bitstring. Using the encryption algorithm, we encode x by $y = 101$. Given that $P.1 = 1$, we can use the convolutional decryption algorithm to decode y into x (using the private keys m , P , and Q).

7. (p, q) -adaptive codes

In order to have more flexibility when developing applications based on adaptive codes, we introduce a natural generalization of adaptive codes, called (p, q) -adaptive codes. For example, extending the

algorithms presented in [11] to (p, q) -adaptive codes is expected to give better results. Let us give a formal definition.

Definition 7.1. Let Σ and Δ be alphabets. A function $c : \Sigma^q \times \Sigma^{\leq p} \rightarrow \Delta^+$ is called (p, q) -adaptive code if its unique homomorphic extension $\bar{c} : \Sigma^* \rightarrow \Delta^*$, given by:

- $\bar{c}(\lambda) = \lambda$,
- $\bar{c}(\sigma_1 \sigma_2 \dots \sigma_m) = c(\sigma_1 \dots \sigma_q, \lambda) c(\sigma_2 \dots \sigma_{q+1}, \sigma_1) \dots c(\sigma_{p+1} \dots \sigma_{p+q}, \sigma_1 \dots \sigma_p) c(\sigma_{p+2} \dots \sigma_{p+q+1}, \sigma_2 \dots \sigma_{p+1}) \dots c(\sigma_{m-q+1} \dots \sigma_m, \sigma_{m-q-p+1} \dots \sigma_{m-q})$

for all strings $\sigma_1 \sigma_2 \dots \sigma_m \in \Sigma^+$, is injective.

Developing applications based on (p, q) -adaptive codes is not a subject of this paper. The concept is presented here just to show how much flexibility we get when using various generalizations of adaptive codes. Let us give an example.

Example 7.1. Let $\Sigma = \{a, b\}$, $\Delta = \{0, 1\}$ be two alphabets, and $c : \Sigma^2 \times \Sigma^{\leq 1} \rightarrow \Delta^+$ a function given as in the table below. One can verify that $\bar{c}$ is injective, and according to Definition 7.1, c is an $(1, 2)$ -adaptive code.

Table 4. An $(1, 2)$ -adaptive code.

$\Sigma^2 \setminus \Sigma^{\leq 1}$	a	b	λ
aa	0	11	00
ab	10	101	11
ba	111	01	10
ba	110	00	01

Let $x = ababa \in \Sigma^+$ be an input data string. Using the definition above, we encode x by

$$\bar{c}(x) = c(ab, \lambda) c(ba, a) c(ab, b) c(ba, a) = 11111101111.$$

8. Adaptive codes and time-varying codes

Time-varying codes have been recently introduced in [14] as a proper extension of L-codes [3]. Intuitively, a time-varying code associates a codeword to the symbol being encoded depending on its position in the input data string. The connection to gsm-codes and SE-codes has been also discussed in [14]. Several characterizations results for time-varying codes can be found in [15]. Let us now give a formal definition.

Definition 8.1. Let Σ and Δ be two alphabets. A function $c : \Sigma \times \mathbb{N}^* \rightarrow \Delta^+$ is called *time-varying code* if its unique homomorphic extension $\bar{c} : \Sigma^* \rightarrow \Delta^*$, given by:

- $\bar{c}(\lambda) = \lambda$,

- $\bar{c}(\sigma_1\sigma_2\ldots\sigma_m) = c(\sigma_1, 1)c(\sigma_2, 2)\ldots c(\sigma_m, m)$

for all strings $\sigma_1\sigma_2\ldots\sigma_m \in \Sigma^+$, is injective.

Motivation. This section is intended to introduce a new class of variable-length codes, called *adaptive time-varying codes*. Combining adaptive codes with time-varying codes can be useful when the input string consists of substrings with different characteristics. Let $x = u_1u_2\ldots u_t \in \Sigma^+$ be an input string, where $u_1, u_2, \ldots, u_t$ are substrings with different characteristics. Instead of associating an adaptive code to x , it is desirable to associate an adaptive code to each substring u_i . For sure, this technique can be exploited further in data compression to improve the results. Combining adaptive codes with time-varying codes leads to the following encoding mechanism: the codeword associated to the current symbol being encoded depends not only on the previous symbols in the input string, but also on the position of the current symbol in the input string. A formal definition is given below.

Definition 8.2. Let Σ and Δ be alphabets. A function $c : \Sigma \times \Sigma^{\leq n} \times \mathbb{N}^* \rightarrow \Delta^+$ is called *adaptive time-varying code of order n* if its unique homomorphic extension $\bar{c} : \Sigma^* \rightarrow \Delta^*$, given by:

- $\bar{c}(\lambda) = \lambda,$
- $\bar{c}(\sigma_1\sigma_2\ldots\sigma_m) = c(\sigma_1, \lambda, 1) c(\sigma_2, \sigma_1, 2) \ldots c(\sigma_{n-1}, \sigma_1\sigma_2\ldots\sigma_{n-2}, n-1) \\ c(\sigma_n, \sigma_1\sigma_2\ldots\sigma_{n-1}, n) c(\sigma_{n+1}, \sigma_1\sigma_2\ldots\sigma_n, n+1) c(\sigma_{n+2}, \sigma_2\sigma_3\ldots\sigma_{n+1}, n+2) \\ c(\sigma_{n+3}, \sigma_3\sigma_4\ldots\sigma_{n+2}, n+3) \ldots c(\sigma_m, \sigma_{m-n}\sigma_{m-n+1}\ldots\sigma_{m-1}, m)$

for all strings $\sigma_1\sigma_2\ldots\sigma_m \in \Sigma^+$, is injective.

Example 8.1. Let $\Sigma = \{a, b\}$, $\Delta = \{0, 1\}$ be two alphabets, and let $c : \Sigma \times \Sigma^{\leq 2} \times \mathbb{N}^* \rightarrow \Delta^+$ be a function given by:

$$c(\sigma, u, i) = \begin{cases} \text{zero}[i] & \text{if } \sigma = a. \\ \text{one}[i] & \text{if } \sigma = b. \end{cases}$$

for all $(\sigma, u, i) \in \Sigma \times \Sigma^{\leq 2} \times \mathbb{N}^*$, where

- $\text{zero}[i] = \underbrace{00\ldots 0}_i,$
- and $\text{one}[i] = \underbrace{11\ldots 1}_i.$

One can verify that $\bar{c}$ is injective, and according to Definition 8.2, c is an adaptive time-varying code of order two. For example, the string $x = abaa$ is encoded by

$$\bar{c}(x) = c(a, \lambda, 1)c(b, a, 2)c(a, ab, 3)c(a, ba, 4) = 0110000000.$$

9. Conclusions and further work

Adaptive codes associate variable-length codewords to symbols being encoded depending on the previous symbols in the input data string. This class of codes has been presented in [11] as a new class of non-standard variable-length codes. Generalized adaptive codes (GA codes, for short) have been also presented in [11], not only as a new class of non-standard variable-length codes, but also as a natural generalization of adaptive codes of any order.

In this paper, we contributed the following results. First, we proved that adaptive Huffman encodings and Lempel-Ziv encodings are particular cases of encodings by GA codes (sections 3 and 4). In section 5, we proved that any $(n, 1, m)$ convolutional code satisfying a certain condition can be modelled as an adaptive code of order m . This result was exploited further in section 6, where an efficient cryptographic scheme based on convolutional codes is described. An insightful analysis of this cryptographic scheme was provided in the same section. In sections 7 and 8, we extended adaptive codes to (p, q) -adaptive codes, and presented a new class of variable-length codes, called adaptive time-varying codes.

Further work in this area is intended to establish new interesting connections between adaptive codes and other classes of codes, along with showing their effectiveness in concrete applications. Future directions related to adaptive codes also include the data compression algorithms recently presented in [11]. For example, combining the extensions described in sections 7 and 8 with the algorithms presented in [11] may lead to better results.

References

- [1] Bell, T. C., Cleary, J. G., Witten, I. H., *Text Compression*, Prentice Hall, 1990.
- [2] Berstel, J., Perrin, D., *Theory of Codes*, Academic Press, 1985.
- [3] Maurer, H. A., Salomaa, A., Wood, D., L codes and number systems, *Theoretical Computer Science*, **22**(3), 1983, 331–346.
- [4] Nelson, M., Gailly, J., *The Data Compression Book*, M&T Books, New York, NY, USA, 1996, 2nd edition.
- [5] Pless, V. S., Huffman, W. C. (Eds.), *Handbook of Coding Theory* (2 volumes), Elsevier, 1998.
- [6] Rozenberg, G., Salomaa, A. (Eds.), *Handbook of Formal Languages*, Springer-Verlag, 1997.
- [7] Salomaa, A., *Jewels of Formal Language Theory*, Computer Science Press, 1981.
- [8] Salomon, D., *Data Compression. The Complete Reference*, Springer-Verlag, 1998.
- [9] Storer, J. A., *Data Compression: Methods and Theory*, Computer Science Press, Rockville, MD, USA, 1988.
- [10] Trincă, D., Adaptive Codes: A New Class of Non-standard Variable-length Codes, (to appear in *Romanian Journal of Information Science and Technology*).
- [11] Trincă, D., Towards New Algorithms for Data Compression using Adaptive Codes, In *Proceedings of the 5th International Conference on Information Technology: Coding and Computing*, Las Vegas, Nevada, USA, April 5–7, 2004, volume 1, pages 767–771. IEEE Computer Society Press.
- [12] Trincă, D., EAH: A New Encoder based on Adaptive Codes, manuscript, 2005.
- [13] Trincă, D., Meta-EAH: An Adaptive Encoder based on Adaptive Codes. Moving between Adaptive Mechanisms, In *Proceedings of the 3rd International Symposium on Information and Communication Technologies*, Las Vegas, Nevada, USA, June 16–18, 2004, pages 220–225. ACM Library.

- [14] Țiplea, F. L., Mäkinen, E., Enea, C., SE-Systems, Timing Mechanisms and Time-Varying Codes, *International Journal of Computer Mathematics* **79**(10), 2002, 1083–1091.
- [15] Țiplea, F. L., Mäkinen, E., Trincă, D., Enea, C., Characterization Results for Time-Varying Codes, *Fundamenta Informaticae* **53**(2), 2002, 185–198.
- [16] Ziv, J., Lempel, A., A universal algorithm for sequential data compression, *IEEE Transactions on Information Theory*, **23**(3), 1977, 337–343.
- [17] Ziv, J., Lempel, A., Compression of individual sequences via variable-rate coding, *IEEE Transactions on Information Theory*, vol. **IT-24**, 1978, 530–536.